

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
 - TEXT CUT OFF AT TOP, BOTTOM OR SIDES
 - FADED TEXT
 - ILLEGIBLE TEXT
 - SKEWED/SLANTED IMAGES
 - COLORED PHOTOS
 - BLACK OR VERY BLACK AND WHITE DARK PHOTOS
 - GRAY SCALE DOCUMENTS
-

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

(12) UK Patent Application (19) GB (11) 2 287 559 (13) A

(43) Date of A Publication 20.09.1995

(21) Application No 9504694.2

(22) Date of Filing 08.03.1995

(30) Priority Data

(31) 06069892 (32) 15.03.1994 (33) JP

(71) Applicant(s)
Hitachi, Ltd.

(Incorporated in Japan)

6 Kanda-Surugadai 4-chome, Chiyoda-ku, Tokyo,
Japan

Hitachi Information Network Ltd

(Incorporated in Japan)

2-6-2 Ohtemachi, Chiyoda-ku, Tokyo, Japan

Hitachi System Engineering Limited

(Incorporated in Japan)

2-16 Omorikita-3-chome, Ota-ku, Tokyo, Japan

(51) INT CL⁶
G06F 11/20

(52) UK CL (Edition N)
G4A AES

(56) Documents Cited
None

(58) Field of Search
UK CL (Edition N) G4A AES
INT CL⁶ G06F
ONLINE : WPI


(72) Inventor(s)
Mitsuyoshi Takizawa
Akinori Minamisawa
Yasushi Meguro
Natsuro Tanaka

(74) Agent and/or Address for Service
Mewburn Ellis
York House, 23 Kingsway, LONDON, WC2B 6HP,
United Kingdom

(54) Parallel processor change-over

(57) A parallel processor system (1) has a current processor group (10) including a plurality of processors (100) and a network connecting the processors to each other, and a standby processor group (20) configured in the same way as the current processor group. Each group has a monitor processor (11, 21). A faulty processor reference ratio or number decided according to the amount of job processing is preset as a function of time to a processor control section (30). On receiving a report notifying occurrence of a failure in a processor from the monitor processor disposed in the current processor group, the processor control section (30) decides the ratio or number of failed processors in the current processor group, and if it equals or exceeds the reference value changes over job processing from the current processor group to the standby processor group.

FIG.1

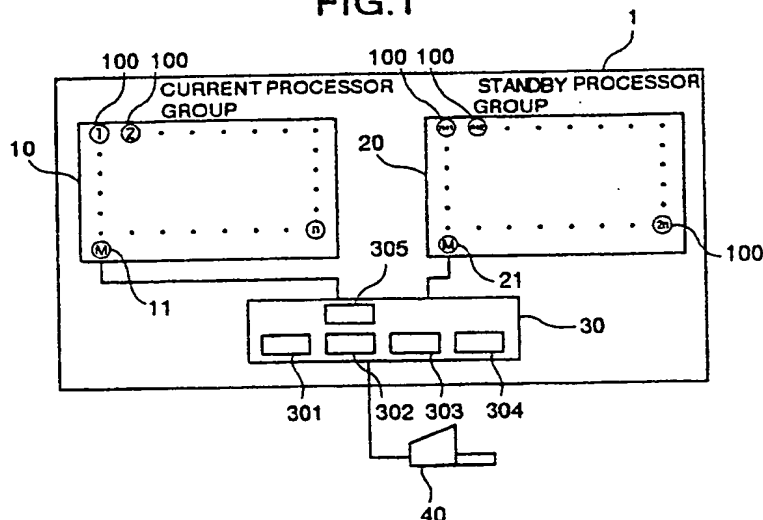

GB 2 287 559 A

117
FIG.1

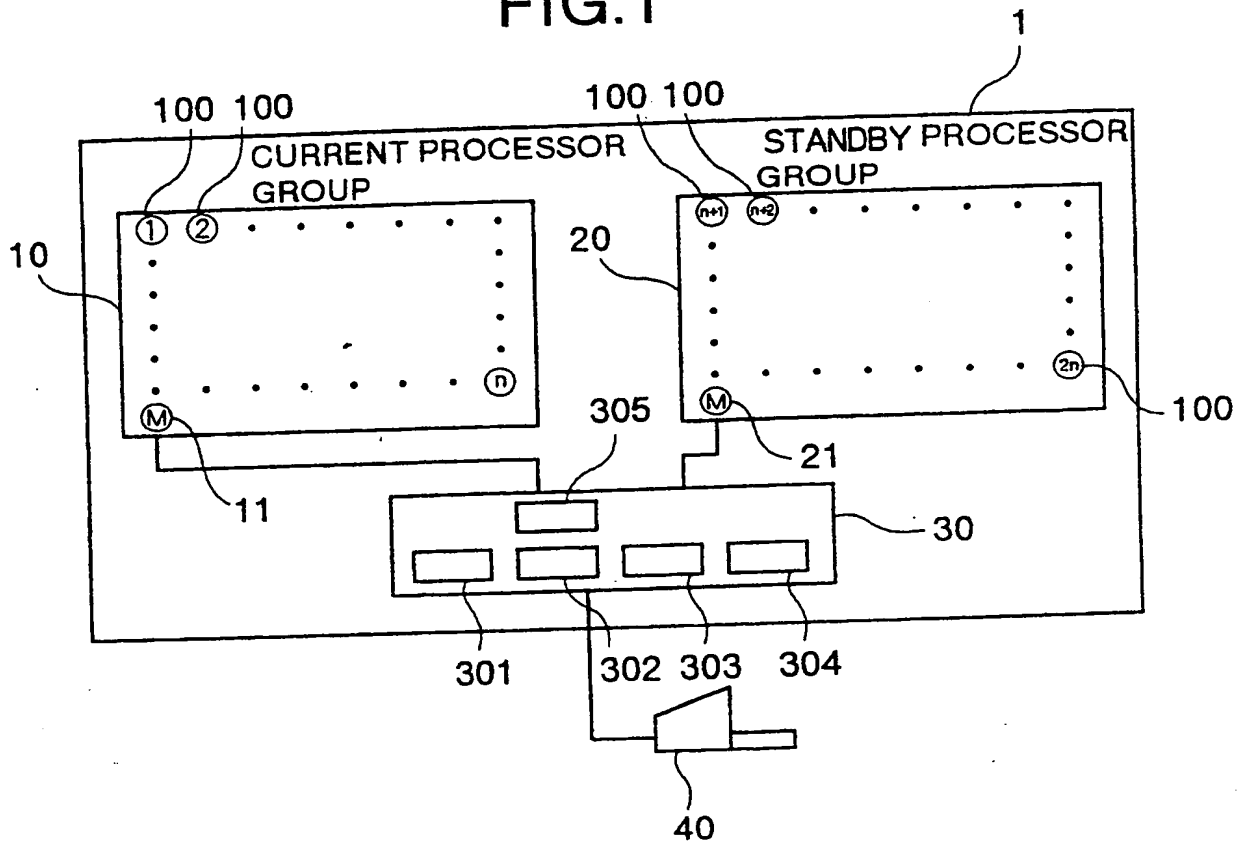


FIG.2

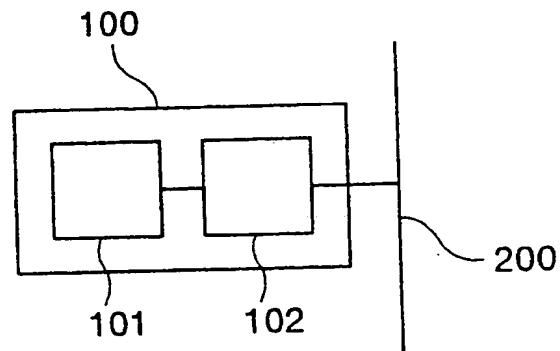


FIG.3

301

LOGICAL ADDRESS	1	2	•	•	•	n
PHYSICAL ADDRESS (CURRENT PROCESSOR GROUP)	1	2	•	•	•	n
PHYSICAL ADDRESS (STANDBY PROCESSOR GROUP)	n+1	n+2	•	•	•	2n

FIG.4

302

TIME (h)	0	...	9	...	17	...	24
FAULTY PROCESSOR RATIO (%)	50	...	25	...	50	...	50

FIG.5

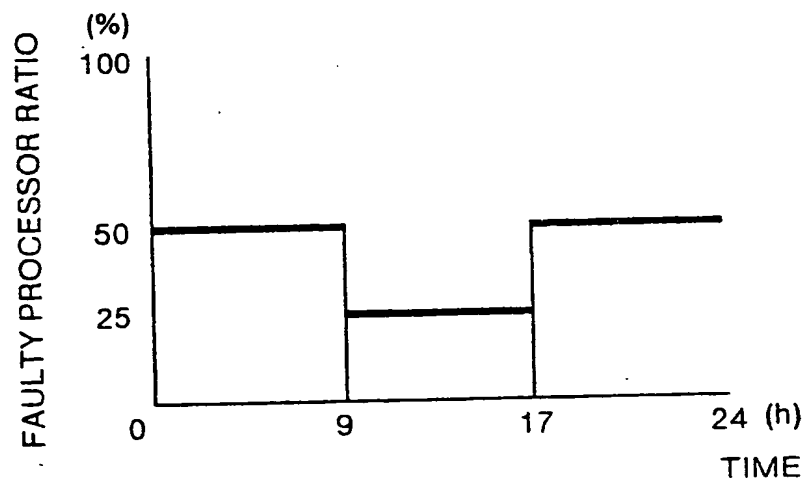


FIG.6

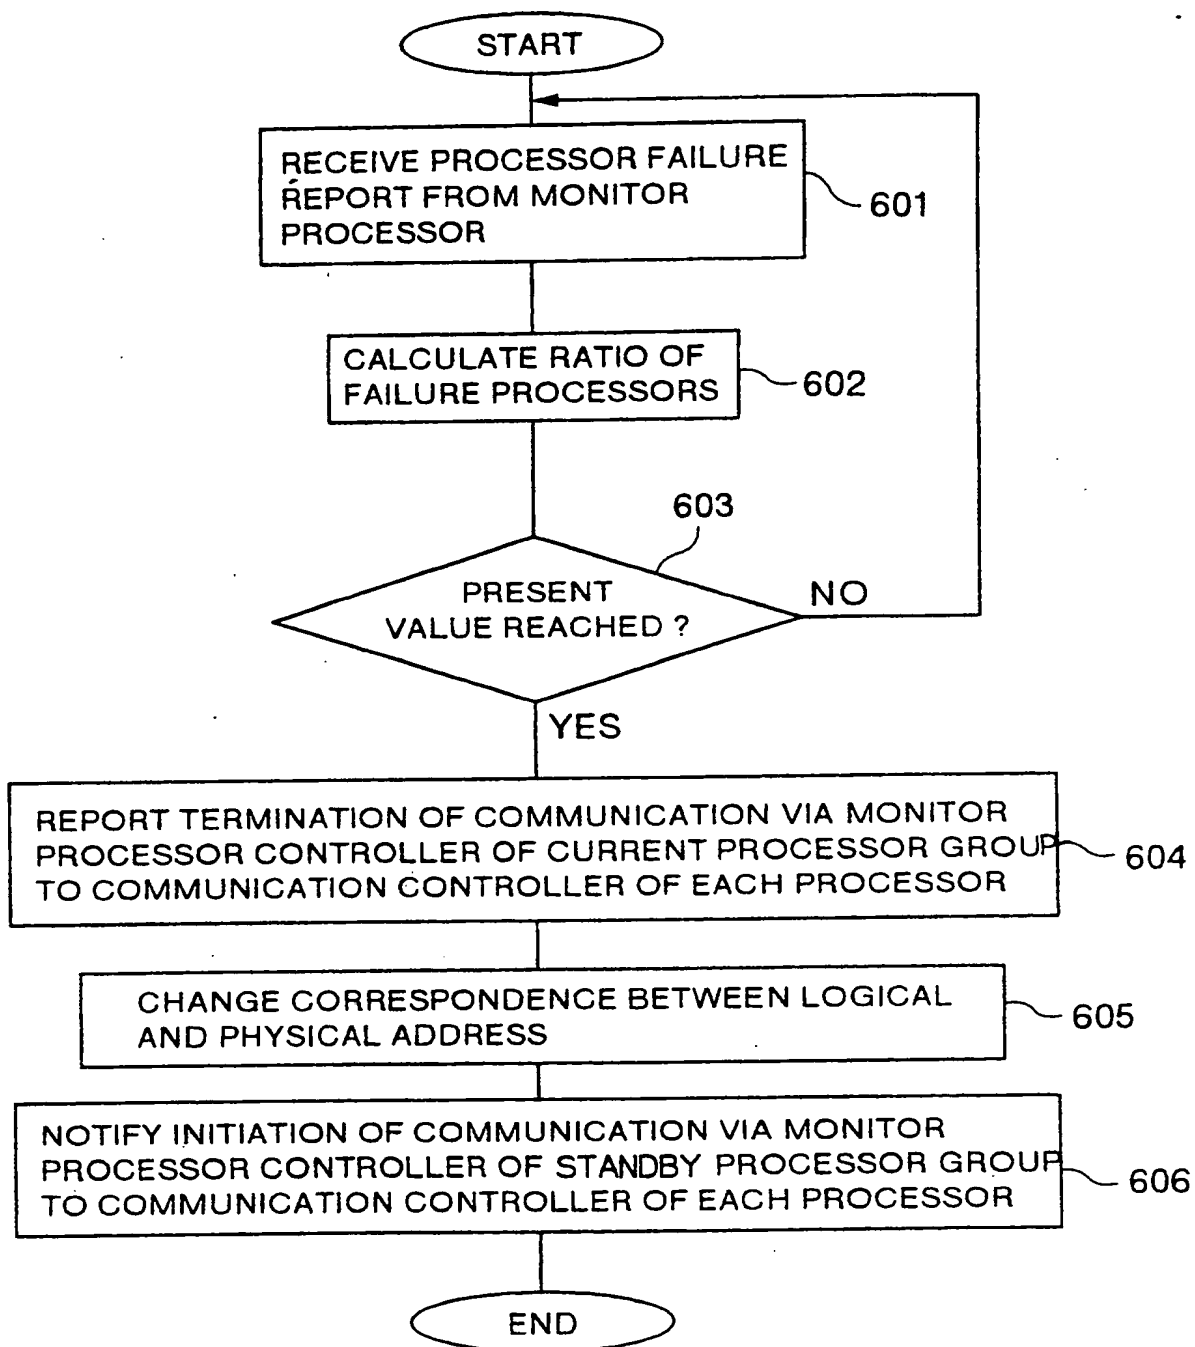


FIG.7

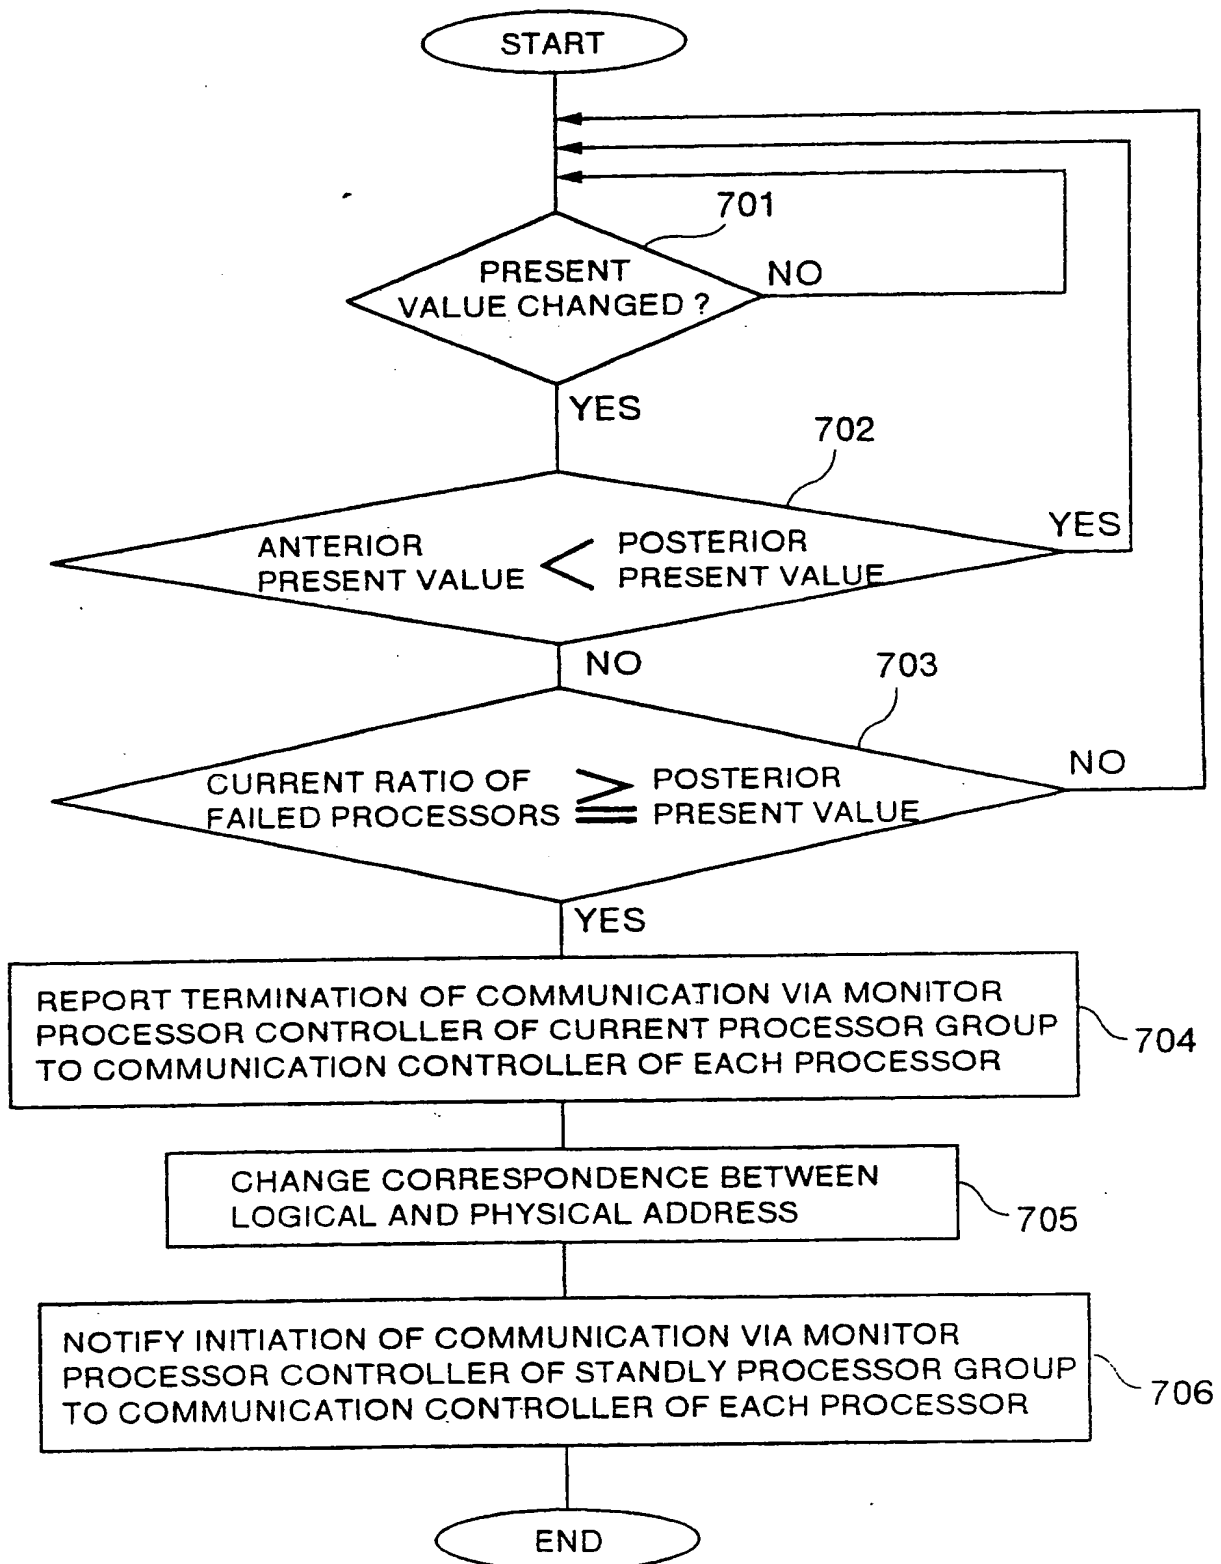


FIG. 8

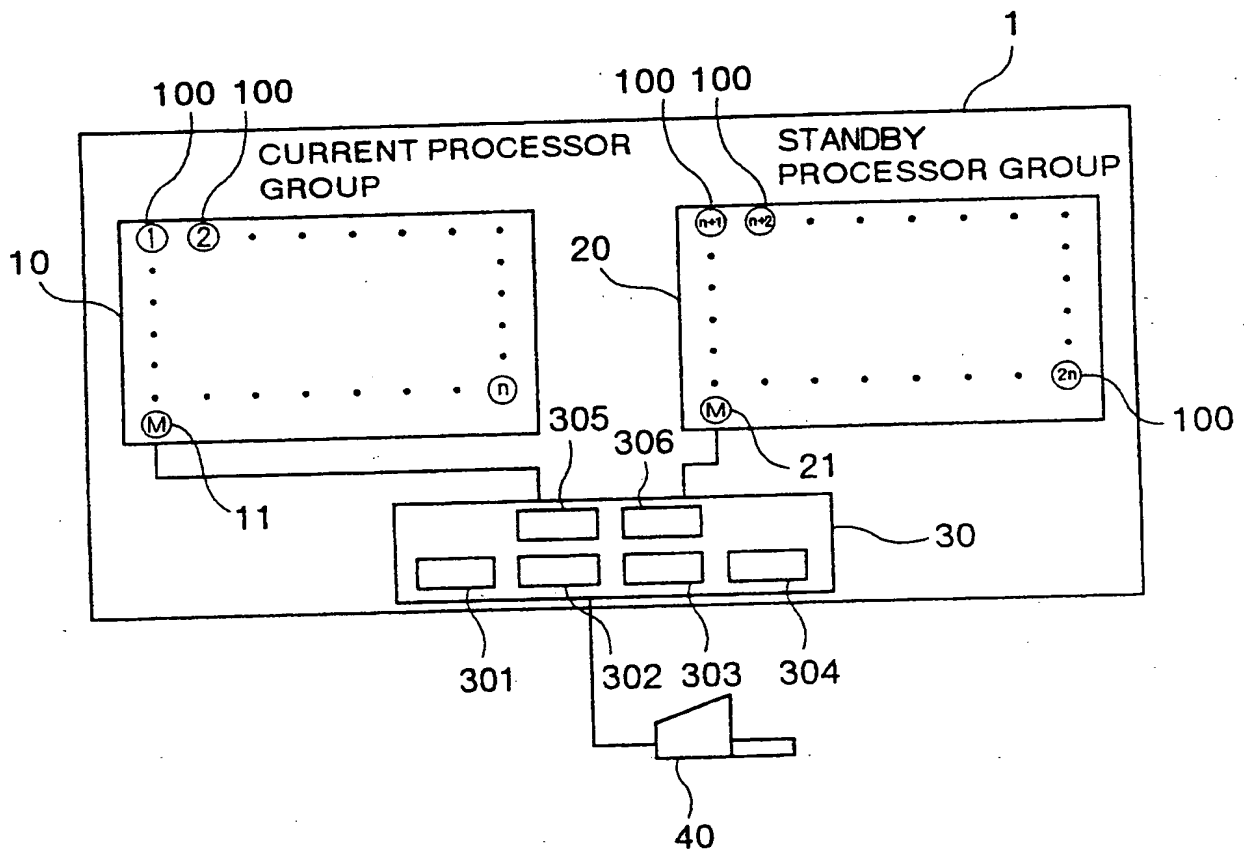


FIG.9


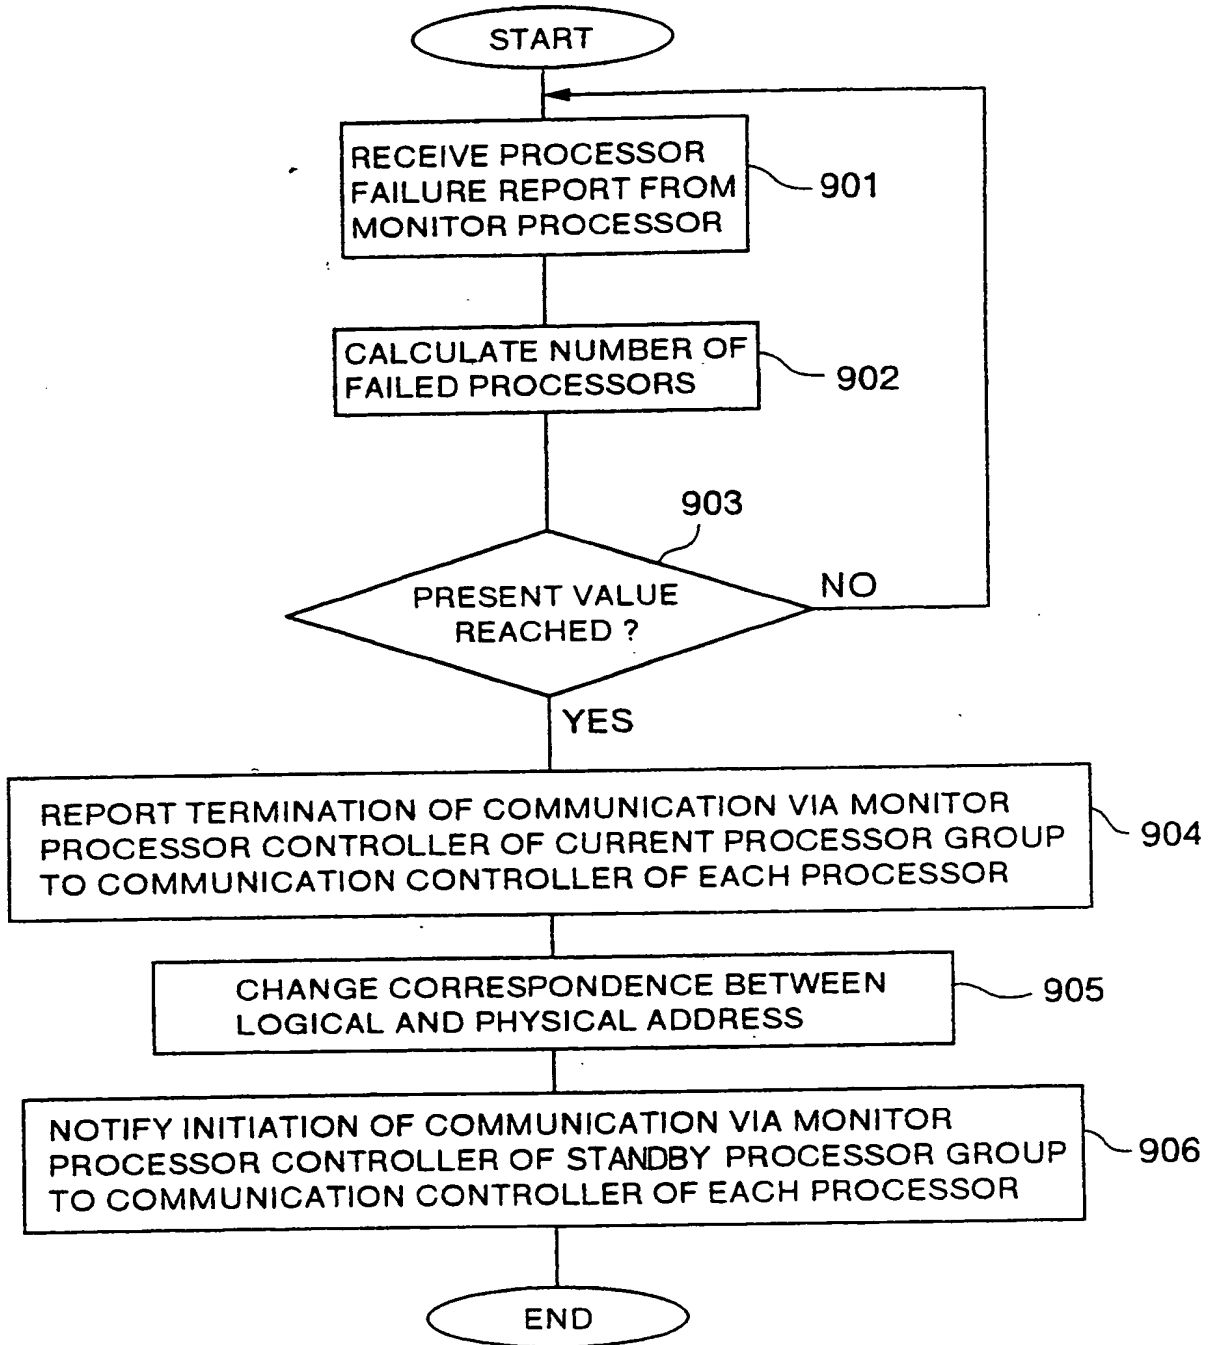


FIG.10

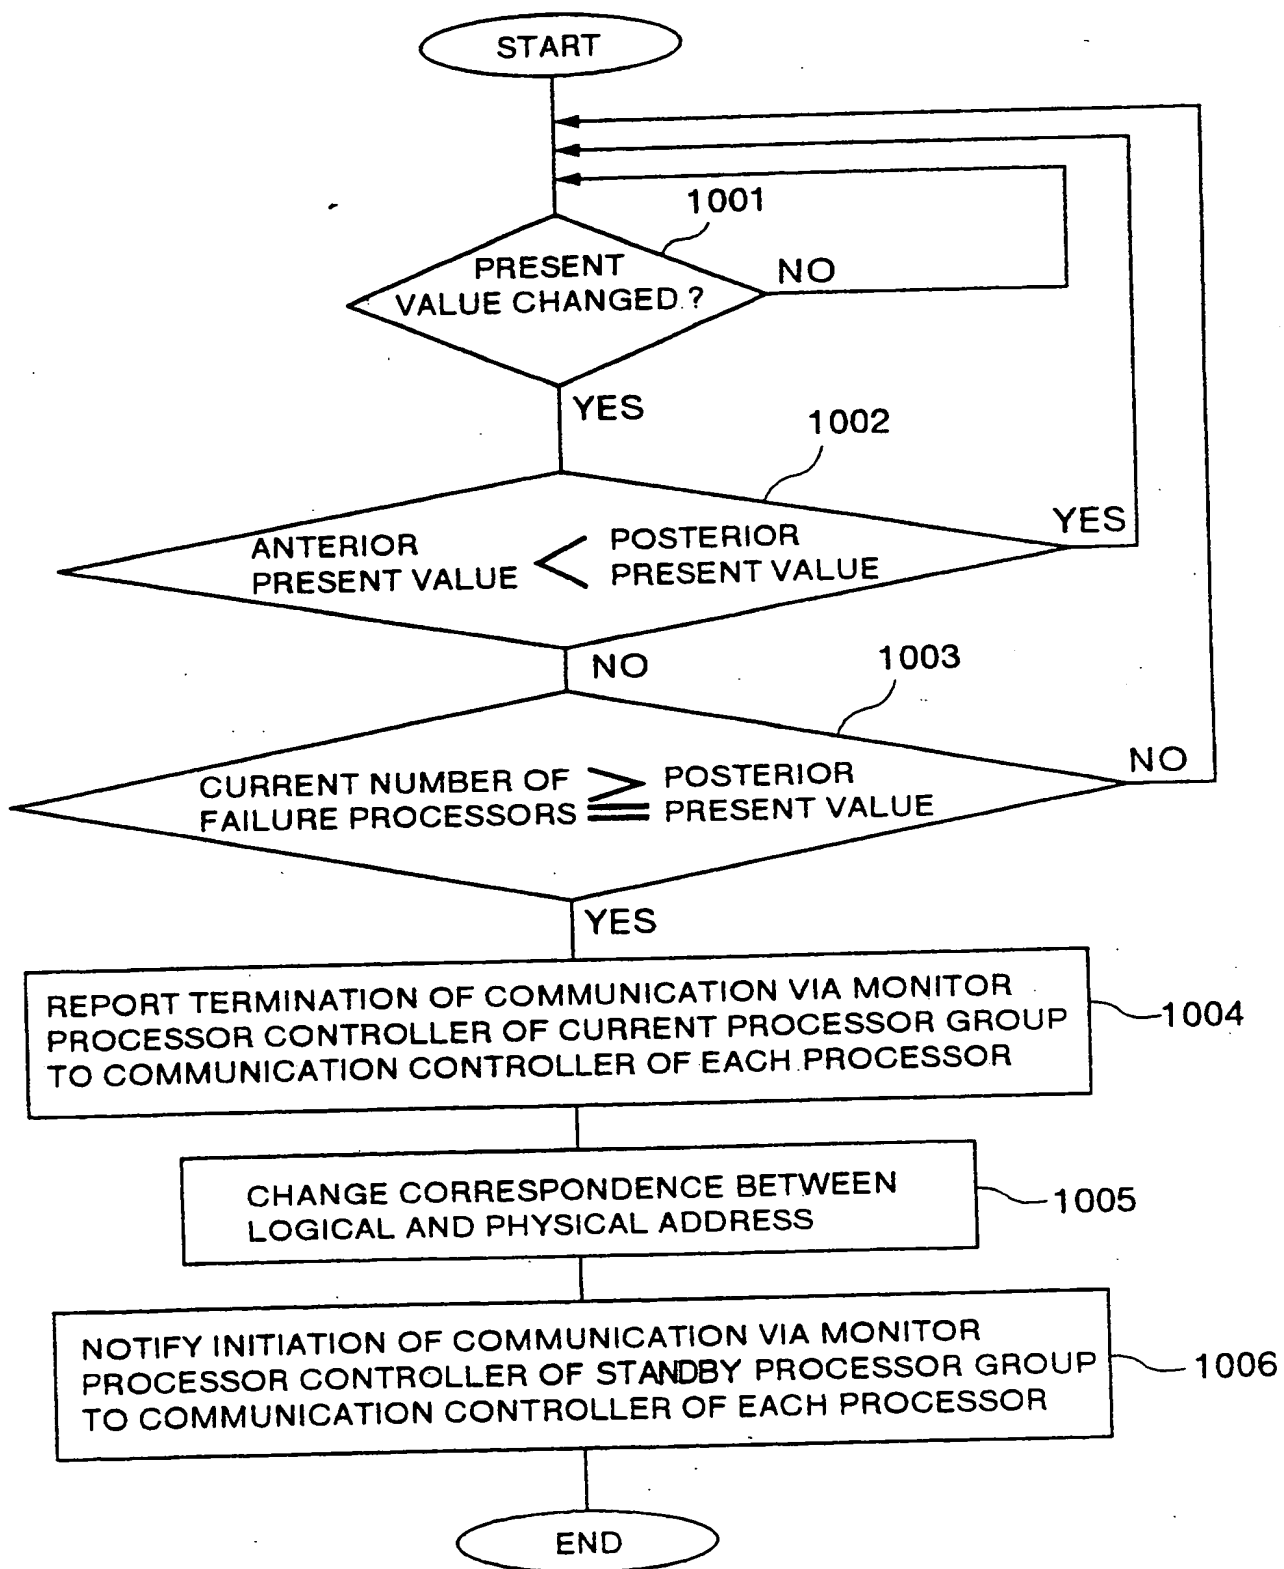

PARALLEL PROCESSOR CHANGE-APPARATUS AND METHOD

The present invention relates to a parallel processor system including a current processor group including current processors and a standby processor group including standby processors and, in particular, to a parallel processor system and a change-over control method of the parallel processor system in which a change-over control operation is achieved from the current processor group to the standby processor group when a failure occurs in some processors in the current processor group.

According to a conventional parallel processor system, when a failure occurs during a job in a processor or some processors, the faulty processor or processors is or are removed from the running system configuration such that the job processing is executed by the remaining processors in a degenerated state. However, in the degenerated system operation, the number of available processors is decreased and hence the job processing performance is lowered in the overall parallel processor system. In some cases, this possibly leads to a case in which some jobs cannot be conducted.

To prevent the disadvantageous event, there has been described in the JP-A-3-132861 a technology in

which a plurality of processors constituting a parallel processor system are grouped into blocks each including several processors such that one processor to several processors (of which the number is less than that of the
5 processors in the pertinent group) are assigned as standby processors for the group. When a processor fails in a block, the processor is replaced with the standby processor thus prepared in advance.

Moreover, there has been also known a
10 technology in which a parallel processor system includes a group of current processors to ordinarily execute job processes and a group of standby processors of which the number of processors is equal to that of the current processors. When a failure occurs in a processor of the
15 current processor group, a change-over operation is conducted to substitute the standby processor group for the current processor group so as to continuously achieve the job processing.

In both of these technologies, when a
20 processor fails, there is used a standby processor or a standby processor group to continue the job process. Consequently, the number of processors responsible for execution of the processing is not decreased and hence the overall processing performance of the parallel
25 processor system is kept unchanged.

In the first technology above, when the number of failed processors exceeds that of standby processors

of the pertinent processor group, the number of
processors to actually execute processing is resultantly
decreased as compared with the number of processors
available in the normal state. This leads to a problem
5 of deterioration in the processing performance of the
overall parallel processor system.

Moreover, in the second technology described
above, even when a failure occurs in a plurality of
processors, the number of available processors is not
10 lowered. However, even when only a processor fails, the
current processor group is replaced with the standby
processor group. Consequently, for example, with
respect to the job processing capacity, even when the
job can be satisfactorily carried out by the remaining
15 processors, there is effected a switching operation from
the current processor group to the standby processor
group, causing a problem that unnecessary change-over
operations are frequently accomplished.

20 It is therefore a first object of the present
invention to provide a change-over control method in
which when one processor or a plurality of processors
fails or fail in a parallel processor system, the
current processor group is efficiently replaced by the
25 standby processor group according to an amount of job
processing while avoiding unnecessary change-over

operations from the current processor group to the standby processor group.

A second object of the present invention is to provide a parallel processor system in which even when
5 one processor or a plurality of processors fails or fail during a job process in a parallel processor system, the job can be continuously processed with a sufficient processing performance according to the quantity of job processing.

10 To achieve the first object according to the present invention, in a change-over control method for use with a parallel processor system including a current processor group including a plurality of processors and a network connecting the processors to each other and a
15 standby processor groups having a configuration equal to that of the current processor group, a processor control section is arranged in the parallel processor system to achieve a change-over operation from the current processor group to the standby processor group, a
20 monitor processor is disposed for each of the processor groups, and a faulty processor ratio is set to the processor control section to indicate a reference value of the ratio of processors failed in the current processor group, the ratio being decided according to
25 the amount of job processing. On receiving a processor failure report from the monitor processor in the current processor group, the processor control section computes the ratio of processors failed in the current processor

group at the pertinent point of time. When the ratio is equal to or more than the faulty processor ratio, a change-over operation is effected from the current processor group to the standby processor group.

5 In order to achieve the second object according to the present invention, a parallel processor system including a current processor group including a plurality of processors and a network connecting the processors to each other and a standby processor groups
10 having a configuration identical to that of the current processor group. Each of the processor groups includes a monitor processor to control processing information of each of the processors respectively of the pertinent processor groups and to detect and report failures
15 occurred in a processor thereof. The system further includes a processor control section to carry out a change-over operation between the current and standby processor groups. The processor control section includes a scheduling table in which the faulty
20 processor ratio determined is set according to the amount of job processing and a change-over control section to compute, when a report of occurrence of a failure is received from the monitor processor of the current processor group, a ratio of processors failed in
25 the current processor group at the pertinent point of time so as to compare the ratio with the faulty processor ratio set in the scheduling table. The

change-over control section accomplishes a change-over operation from the current processor group to the standby processor group when the above ratio is equal to or more than the faulty processor ratio. Moreover, 5 there is included an operator's console connected to the processor control section for arbitrarily setting the faulty processor ratio to the scheduling table.

In accordance with the present invention as described above, the change-over operation from the 10 current processor group to the standby processor group is conducted on the basis of the faulty processor ratio assigned according to the job processing amount. In consequence, in case where a failure occurs in a processor of the current processor group, when the job 15 can be satisfactorily achieved by the remaining processors, the job process is continuously executed. When the ratio of failed processors reaches the faulty processor ratio, the current processor group is replaced with the standby processor group. Consequently, the 20 switching operation between the current and standby processor groups can be effectively carried out while efficiently developing the processing performance of each processor and the job processing can be executed with a sufficient processing performance.

25

These and other objects and advantages of the present invention will become apparent by reference to

the following description and accompanying drawings wherein:

Fig. 1 is a block diagram showing an embodiment of the parallel processor system according to
5 the present invention;

Fig. 2 is a block diagram showing a specific structure of a processor;

Fig. 3 is a table showing the contents of an address control table keeping therein logical addresses
10 and physical addresses related thereto;

Fig. 4 is a table showing the contents of a scheduling table keeping therein values of faulty processor ratio set at predetermined points of time;

Fig. 5 is a graph showing the values of faulty
15 processor ratio set at predetermined points of time;

Fig. 6 is a flowchart showing operation of a processor control section in a processor group switching operation;

Fig. 7 is a flowchart showing operation of a
20 processor control section when the faulty processor ratio is changed;

Fig. 8 is a block diagram showing another embodiment of the parallel processor system according to the present invention;

25 Fig. 9 is a flowchart showing operation of the processor control section in a processor group switching operation; and

Fig. 10 is a flowchart showing operation of the processor control section when the number of faulty processors is changed;

5 In Fig. 1, a parallel processor 1 according to the present invention includes a current processor group 10 for ordinarily conducting a job process and a standby processor group 20 which is substituted for the current processor group 10 through a change-over operation when
10 a failure occurs in a processor of the current processor group 10 to continuously execute the job process. Each of the processor groups 10 and 20 includes n processors 100.

 The parallel processor system 1 includes a
15 processor control section 30 which controls configurations of the processor groups 10 and 20 and operation states of the respective processors 100 and which computes the ratio of failed processors in the current processor group 10. When the ratio reaches a
20 predetermined faulty processor ratio, the processor control section 30 indicates a change-over operation from the current processor group 10 to the standby processor group 20. Namely, the section 30 includes a processor to primarily conduct the switching operation
25 between the processor groups 10 and 20.

 The current processor groups 10 includes a monitor processor 11, whereas the standby processor

group 20 has a monitor processor 21. The processor control section 30 is logically linked with the monitor processors 11 and 21.

As can be seen from Fig. 2, each of the
5 processors including the processors 100 and monitor processors 11 and 21 includes a processor section 101 for actually executing processing and a communication control section 102 for achieving initiation and termination of communication with a network and
10 recognizing logical addresses. In the processor groups 10 and 20, the processors 100 and monitor processors 11 and 21 are respectively connected to each other via a network bus 200. The monitor processors 11 and 21 as well as the processors 100 have the same constitution.
15 Each of the monitor processors 11 and 21 is not responsible for the job processing. The monitor processor 11 or 21 assigns processing to each processor 100 in the own processor group, controls the processing state and history thereof, detects occurrence of
20 failures in the processors 100, and notifies the failures to the processor 100 of the processor control section 30.

The processor controller 30 includes an address control table 301 keeping therein physical
25 addresses 1 to $2n$ of the processors and logical addresses 1 to n associated therewith, a scheduling table 302 to which values of faulty processor ratio determined according to the job processing amount are

set, a timer 303 for measuring time, a storage section 304 for transferring the contents of processing from the current processor group 10 to the standby processor group 20, and a change-over control section 305 for
5 deciding and indicating a switching operation from the current processor group 10 to the standby processor group 20. As shown in Fig. 3, the address control table 301 keeps therein physical addresses 1 to n of the respective processors 100 in the current processor group
10 10 and physical addresses $n + 1$ to $2n$ thereof in the current processor group 20 with correspondences established between the physical and logical addresses. As can be seen from Fig. 4, the scheduling table 302 contains predetermined values of faulty processor ratio
15 at the pertinent points of time.

There is also disposed an operator's console 40 connected to the processor control section 30. From the console 40, the faulty processor ratio can be arbitrarily set to the scheduling table 302.

20 Description will next be given to operation of the parallel processor system 1 according to the embodiment.

In this embodiment, it is assumed as shown in Figs. 4 and 5 that the values of faulty processor ratio
25 indicating a switching operation from the current processor group 10 to the standby processor group 20 are beforehand set from the console 40 to the scheduling table 302 of the processor controller 30. Namely, the

ratio is set to 50%, 25%, and 50% for the ranges from 0 h to 9 h, from 9 h to 15 h, and from 17 h to 24 h, respectively.

When executing a job processing in response to an external process request in the parallel processor system 1, the request is first received by the monitor processor 11 of the current processor group 10. The processor 11 classifies the received request into several processes to be assigned to the respective processors 100 of the own processor group 10.

At predetermined points, the monitor processor 11 writes such information items in the storage 304 of the controller 30 as allocation of processes to the processors 100, processing states thereof, and processing history (to be called processing information herebelow) thereof.

Each processor 100 supplies the monitor processor 11 at a fixed interval of time with a message indicating the normal operation state thereof. Examining the messages from the processors 100, the monitor processor 11 assumes a failure of a processor when the message is not received therefrom for a predetermined period of time and notifies occurrence of a failure of the processor 100 to the processor controller 30.

Referring now to Fig. 6, description will be given of operation of the processor control section 30

when a report of failure in the processor 100 is received from the monitor processor 11.

When the report of failure in the processor 100 is received from the monitor processor (step 601),
5 the switching control section 305 computes the ratio of failed processors in the current processor group 10 at the pertinent point of time (step 602). The change-over controller 305 compares the computed ratio with a faulty processor ratio which is preset in the scheduling table
10 302 and which corresponds to a point of time indicated by the timer 303 (step 603). When the ratio is resultantly less than the faulty processor ratio, the switching operation from the current processor group 10 to the standby processor group 20 is not conducted.
15 Namely, the switching controller 305 waits for reception of the next report from the monitor processor.

As a result of comparison, when the computed ratio is equal to or more than the faulty processor ratio, termination of communication is notified via the
20 monitor processor 11 to the communication controller 102 of each processor 100 of the current processor group 10 (step 604). Referring thereafter to the address control table 301, the physical addresses corresponding to the respective logical addresses 1 to n are changed from the
25 physical addresses of the respective processors 100 of the current processor group 10 to those of the respective processors 100 of the standby processor group 20 (step 605). Communicability as well as the logical

addresses corresponding to the physical addresses of the respective processors 100 are then reported via the monitor processor 21 to the communication controller 102 of each processor 100 of the standby processor group 20
5 (step 606).

In responsive to the notification from the processor controller 30, the communication controller 102 of the processor 100 starts communication with the network and recognizes logical addresses denoted by the
10 request. The monitor processor 21 then accesses the storage 304 of the processor controller 30 to read processing information of each processor written therein by the monitor processor 11. The monitor processor 21 receives allocation of processes to the respective
15 processors 100 of the current processor group 10, notifies the processing history to each processor 100 of the standby processor group 20, and then transfers job processes of the processors 100 from the current processor group 10 to the standby processor group 20,
20 thereby completing the entire switching operation.

In the embodiment above, when the report of failure of the processor 100 is received from the monitor processor 11, the processor controller 30 decides whether or not the change-over operation is to
25 be achieved from the current processor group 10 to the standby processor group 20. However, since the faulty processor ratio set to the scheduling table 302 takes

various values at the respective points of time, even when a ratio of failed processors is less than the pertinent faulty processor ratio at a point of time, the ratio may possibly reach a faulty processor ratio at the
5 next point of time. Consequently, it is necessary to appropriately accomplish the switching operation in the above case. Referring now to Fig. 7, description will be given of operation of the processor controller 30 in such a case.

10 Each time the timer 303 indicates a new point of time, the switching controller 305 makes a check to decide whether or not the faulty processor ratio is changed in the scheduling table 302 (step 701). In this embodiment, as can be seen from Figs. 4 and 5, the
15 faulty processor ratio is altered at two points, namely, 9 h and 17 h. In consequence, when the faulty processor ratio is changed (at 9 or 17 o'clock), the switching controller 305 compares the faulty processor ratio before the change point with the faulty processor ratio
20 thereafter (step 702). When the anterior ratio is larger as a result of the comparison, the switching operation from the current processor group 10 to the standby processor group 20 is skipped. Namely, the
switching controller 305 waits for reception of a report
25 of failure from the monitor processor 11 or a subsequent point of change of the faulty processor ratio.

As a result of the comparison, when the anterior ratio before the change is smaller, the ratio

of failed processors 100 at the pertinent point of time is compared with the posterior faulty processor ratio after the change (step 703). When the ratio of failed processors 100 is less than the posterior faulty processor ratio as a result of the comparison, the switching operation from the current processor group 10 to the standby processor group 20 is not effected. The switching controller 305 waits for a report of failure from the monitor processor 11 or a subsequent point of change of the faulty processor ratio.

When the anterior ratio before the change is resultantly equal to or larger than the posterior faulty processor ratio, there are conducted operations (steps 704 to 706) similar to those described above (step 604 and subsequent steps of Fig.6) and then the switching operation is carried out from the current processor group 10 to the standby processor group 20.

Next, description will be given of another embodiment according to the present invention. In the above embodiment, the switching operation from the current processor group 10 to the standby processor group 20 is accomplished on the basis of the faulty processor ratio. In contrast therewith, the switching operation is carried out according to the number of failed processors.

In a parallel processor system of the embodiment shown in Fig. 8, the processor control section 30 includes, in addition to the constituent

components of the system 1 of Fig. 1, a counter 306 for counting the number of failed processors when a report of processor failure is received from the monitor processor 11. In the scheduling table 302, there are
5 set the number of faulty processors decided according to the job processing amount at each preset point of time. The other configurations are the same as those of the embodiment of Fig. 1 and hence description thereof will be avoided.

10 Referring now to Fig. 9, description will be given of operation of the processor controller 30 when a notification of a failure in a processor 100 is received from the monitor processor 11.

On receiving the report of processor failure
15 from the monitor processor 11 (step 901), the counter 306 counts the number of failed processors 100 (step 902). The change-over controller 305 then compares the resultant number of failed processors 100 with the number of faulty processors preset in the scheduling
20 table 302 corresponding to the time indicated by the timer 303 (step 903). As a result of the comparison, when the number of failed processors is less than that indicated in the table 302, the switching operation from the current processor group 10 to the standby processor
25 group 20 is not effected. The change-over controller 305 waits for reception of a subsequent notification from the monitor processor 11.

When the number of failed processors is equal to or more than that indicated in the table 302 as a result of the comparison, the system conducts operation (steps 904 to 906) similar to that of the first
5 embodiment (step 604 and subsequent operations of Fig. 6) and then replaces the current processor group 10 with the standby processor group 20.

Referring now to Fig. 10, description will be given of operation of the processor control section 30
10 when the number of faulty processors is changed in the scheduling table 302.

When the timer 303 indicates a new point of time, the switching control section 305 decides whether or not the number of faulty processors is changed in the
15 scheduling table 302 (step 1001). If the number is altered, the controller 305 compares the value of the number used up to this point of time and that of the number to be subsequently employed (step 1002). As a result, when the latter is equal to or more than the
20 former, the switching operation from the current processor group 10 to the standby processor group 20 is not effected. As described above, the change-over controller 305 waits for reception of a subsequent failure notification from the monitor processor 11 or a
25 subsequent change in the number of faulty processors.

As a result of the comparison, when the posterior value is less than the anterior value, the change-over controller 305 compares the number of failed

processors 100 counted by the counter 306 up to the
pertinent point of time with the posterior number of
faulty processors to be subsequently used (step 1003).
If the the number indicated by the counter 306 is less
5 than the posterior number of faulty processors 100, the
system conducts the change-over operation from the
current processor group 10 to the standby processor
group 20. Namely, the change-over controller 305 waits
for a failure notification from the monitor processor 11
10 or a subsequent change in the number of faulty
processors.

If the the number indicated by the counter 306
is resultantly equal to or more than the number of
faulty processors 100, there is achieved operations
15 (steps 1004 to 1006) similar to those (step 604 and
subsequent operations of Fig.6) of the first embodiment
and then the switching controller 305 conducts the
change-over operation from the current processor group
10 to the standby processor group 20.

20 Description has been given of the present
invention by reference to the embodiments. However, it
is to be appreciated that the present invention is not
restricted by the embodiments and can be changed or
modified within the scope and spirit of the present
25 invention.

For example, although the parallel processor
system includes one current processor group and one
standby processor group in the description of the

embodiments, it is also possible to use a plurality of current processor groups and a plurality of standby processor groups. In such a case, there can be considered various configurations, for example, a
5 construction including two or more current processor groups and one standby processor group and a configuration including two or more current processor groups and two or more standby processor groups.

In the change-over control method for use with
10 a parallel process system in accordance with the present invention, the change-over operation is effected from the current processor group to the standby processor group on the basis of the faulty processor ratio or the number of faulty processors determined according to the
15 amount of job processing. Consequently, in case where a failure occurs in a processor of the current processor group, when the job can be completely conducted by the remaining processors, the change-over operation is not carried out. Resultantly, processing performance of
20 each processor can be efficiently utilized; moreover, the switching operation from the current processor group to the standby processor group can be effectively carried out.

In addition, the faulty processor ratio or the
25 number of faulty processors can be arbitrarily specified at the pertinent point of time. Consequently, in accordance with the state of daily job processing, the change-over operation can be achieved from the current

processor group to the standby processor group on the basis of the optimal processor utilization ratio at the respective points of time.

According to the parallel processor system of the present invention, in case where a processor fails during a job process, the job is continuously carried out when the remaining processors can fully accomplish the job. Namely, when the ratio of failed processors reaches the faulty processor ratio or the ratio related to the number of failed processors decided according to the job processing amount, the switching operation is executed from the current processor group to the standby processor group to continue the processing of the job. Consequently, the job can be processed with a sufficient processing performance by completely using the processing capability of each processor.

While the present invention has been described with reference to the particular illustrative embodiments, it is not to be restricted by those embodiments.

It is to be appreciated that those skilled in the art can change or modify the embodiments without departing from the scope and spirit of the present invention.

CLAIMS:

1. A change-over control method for use with a parallel processor system including a current processor group including a plurality of processors and a network connecting the processors to each other and a standby processor group including a plurality of processors and a network connecting the processors to each other, the
5 current and standby processor groups including the same number of processors, comprising the following steps of:
 - disposing a processor control section in the parallel processor system;
 - arranging a monitor processor in the current
10 processor group and a monitor processor in the standby processor group;
 - deciding a faulty processor ratio according to an amount of job processing in the parallel processor system;
 - 15 setting the faulty processor ratio in the processor control section;
 - calculating by the processor control section, when a report notifying occurrence of a failure in a processor is received from the monitor processor
20 disposed in the current processor group, a ratio of failed processors in the current processor group at a pertinent point of time;
 - comparing the ratio with the faulty processor ratio; and

conducting, when the ratio is equal to or more than the faulty processor ratio, a change-over operation of transferring job processing from the current processor group to the standby processor group.

- 5 2. A change-over control method according to Claim 1, further including the steps of:

reporting at a preset point of time by the monitor processor disposed in the current processor group processing information of each of the processors
10 belonging to the current processor group to the processor control section;

keeping by the processor control section the processing information therein;

notifying by the processor control section,
15 when the job processing is transferred from the current processor group to the standby processor group, termination of communication to each of the processors belonging to the current processor group;

reporting logical addresses corresponding to
20 respective physical addresses of each of the processors belonging to the standby processor group and initiation of communication to each of the processors belonging to the standby processor group;

reading by the monitor processor disposed in
25 the standby processor group the processing information from the processor control section and notifying the processing information to each of the processors

belonging to the standby processor group; and
receiving and executing by each of the
processors belonging to the standby processor group the
job processing from each of the processors belonging to
5 the current processor group.

3. A change-over control method according to
Claim 1, further including the steps of:

deciding a number of failed processors in
place of the faulty processor ratio according to an
10 amount of job processing;

setting the number of failed processors in the
processor control section;

calculating by the processor control section,
each time a report notifying occurrence of a failure in
15 a processor is received from the monitor processor
disposed in the current processor group, the number of
failed processors;

comparing the calculated number with the
number of faulty processors; and

conducting, when the number reaches the number
20 of faulty processors, a change-over operation of
transferring job processing from the current processor
group to the standby processor group.

4. A change-over control method for use with a
parallel processor system including a current processor
25 group including a plurality of processors and a network
connecting the processors to each other and a standby

processor group including a plurality of processors and a network connecting the processors to each other, the current and standby processor groups including the same number of processors, comprising the following steps of:

5 disposing a processor control section in the parallel processor system;

 arranging a monitor processor in the current processor group and a monitor processor in the standby processor group;

10 disposing a timer in the processor control section;

 deciding a faulty processor ratio at a predetermined interval of time according to an amount of job processing in the parallel processor system;

15 setting the faulty processor ratio in the processor control section;

 calculating by the processor control section, when a report notifying occurrence of a failure in a processor is received from the monitor processor

20 disposed in the current processor group, a ratio of failed processors in the current processor group at a pertinent point of time;

 comparing the ratio with the faulty processor ratio corresponding to a point of time indicated by the
25 timer; and

 conducting, when the ratio is equal to or more than the faulty processor ratio, a change-over operation of transferring job processing from the current

processor group to the standby processor group.

5. A change-over method according to Claim 4, further including the steps of:

deciding by the processor control section,
5 each time the time indicated by the timer is changed,
whether or not the anterior faulty processor ratio
before the pertinent point of time is different from a
posterior faulty processor ratio to be employed
thereafter;
10 comparing, when the ratios are different from
each other, the anterior faulty processor ratio with the
posterior faulty processor ratio;

calculating, when the posterior faulty
processor ratio is less than the anterior faulty
15 processor ratio, a ratio of processors failed up to this
point of time in the current processor groups;

comparing the obtained ratio with the
posterior faulty processor ratio; and

conducting, when the ratio is equal to or more
20 than the posterior faulty processor ratio, a change-over
operation of transferring job processing from the
current processor group to the standby processor group.

6. A change-over control method according to
Claim 4, further including the steps of:

25 reporting at a preset point of time by the
monitor processor disposed in the current processor
group processing information of each of the processors

belonging to the current processor group to the processor control section;

keeping by the processor control section the processing information;

5 notifying by the processor control section, when the job processing is transferred from the current processor group to the standby processor group, termination of communication to each of the processors belonging to the current processor group;

10 reporting logical addresses corresponding to respective physical addresses of each of the processors belonging to the standby processor group and initiation of communication to each of the processors belonging to the standby processor group;

15 reading by the monitor processor disposed for the standby processor group the processing information from the processor control section and notifying the processing information to each of the processors belonging to the standby processor group; and

20 receiving and executing by each of the processors belonging to the standby processor group the job processing from each of the processors belonging to the current processor group.

7. A change-over control method according to Claim 4, further including the steps of:

25 deciding a number of failed processors in place of the faulty processor ratio according to an amount of job processing;

setting the number of failed processors in the processor control section;

calculating by the processor control section, each time a report notifying occurrence of a failure in
5 a processor is received from the monitor processor disposed in the current processor group, the number of failed processors;

comparing the calculated number with the number of faulty processors corresponding to the time
10 indicated by the timer; and

conducting, when the number reaches the number of faulty processors, a change-over operation of transferring job processing from the current processor group to the standby processor group.

15 8. A change-over method according to Claim 7, further including the steps of:

deciding by the processor control section, each time the time indicated by the timer is changed, whether or not the anterior number of failed processors
20 before the pertinent point of time is different from a posterior number of failed processors to be utilized thereafter;

comparing, when the numbers are different from each other, the anterior number with the posterior
25 number;

comparing, when the posterior number is less than the anterior number, the number of processors

failed up to this point of time in the current processor groups with the posterior number of failed processors; and

conducting, when number of processors failed up to this point of time in the current processor groups is equal to or more than the posterior number of failed processors, a change-over operation of transferring job processing from the current processor group to the standby processor group.

9. A parallel processor system including a current processor group including a plurality of processors and a network connecting the processors to each other and a standby processor group including a plurality of processors and a network connecting the processors to each other, the current and standby processor groups including the same number of processors, comprising:

a monitor processor disposed in the current processor group and a monitor processor disposed in the standby processor group for controlling processing information of each of the processors in the current and standby processor groups, respectively;

a processor control section for achieving a change-over operation from the current processor group to the standby processor group;

an address control table for keeping therein physical and logical addresses of each processor of each of the current and standby processor groups with

correspondences established therebetween;

a scheduling table for setting therein a faulty processor ratio decided according to an amount of job processing in the parallel processor system;

5 a storage section for storing therein processing information of each processor reported at a predetermined point of time from a monitor table disposed in the current processor group;

a change-over control section for calculating,
10 when a report notifying occurrence of a failure in a processor is received from the monitor processor disposed in the current processor group, a ratio of failed processors in the current processor group at a pertinent point of time, comparing the ratio with the
15 faulty processor ratio set in the scheduling table, and conducting, when the ratio is equal to or more than the faulty processor ratio, a change-over operation of transferring the job processing from the current processor group to the standby processor group; and

20 an operator's console connected to the processor control section for arbitrarily setting therefrom the faulty processor ratio to the scheduling table.

10. A parallel processor system according to Claim
25 9, wherein the processor control section includes:

a timer for measuring time;

a scheduling table for setting therein at a predetermined interval time a faulty processor ratio

decided according to an amount of job processing in the parallel processor system; and

a change-over control section for calculating, when a report notifying occurrence of a failure in a processor is notified from the monitor processor disposed in the current processor group, a ratio of failed processors in the current processor group at a pertinent point of time, comparing the ratio with the faulty processor ratio set in the scheduling table corresponding to a point of time indicated by the timer, and conducting, when the ratio is equal to or more than the faulty processor ratio, a change-over operation of transferring the job processing from the current processor group to the standby processor group.

11. A parallel processor system according to Claim 9, wherein the processor control section further includes:

a counter for counting, when a report notifying occurrence of a failure in a processor is received from the monitor processor, the number of failed processors;

a scheduling table for setting therein the number of faulty processors decided according to an amount of job processing in the parallel processor system; and

a change-over control section for comparing, when a report notifying occurrence of a failure in a processor is received from the monitor processor

disposed in the current processor group, the number counted by the counter with the number of faulty processors set in the scheduling table and conducting, when the counted number is equal to or more than the number of faulty processors, a change-over operation of transferring the job processing from the current processor group to the standby processor group.

12. A parallel processor system according to Claim 11, wherein the processor control section further includes:

- 10 a timer for measuring time;
- a scheduling table for setting therein at a predetermined interval of time the number of faulty processors decided according to an amount of job processing in the parallel processor system; and
- 15 a change-over control section for comparing, when a report notifying occurrence of a failure in a processor is received from the monitor processor disposed in the current processor group, the number of faulty processors set in the scheduling table
- 20 corresponding to a point of time indicated by the timer with the number of failed processors counted by the counter and conducting, when the counted number is equal to or more than the number of faulty processors, a change-over operation of transferring the job processing
- 25 from the current processor group to the standby processor group.

13. A change-over control method for use with a parallel processor system substantially as any one herein described with reference to the accompanying drawings.

14. A parallel processor system substantially as herein described with reference to and as illustrated in Figs. 1 to 7, or Figs. 8 to 10 of the accompanying drawings.

Patents Act 1977
Examiner's report to the Comptroller under Section 17
(The Search report)

Application number
 GB 9504694.2

Relevant Technical Fields

(i) UK Cl (Ed.N) G4A (AES)

(ii) Int Cl (Ed.6) G06F

Search Examiner
 M J DAVIS

Date of completion of Search
 1 MAY 1995

Databases (see below)

(i) UK Patent Office collections of GB, EP, WO and US patent specifications.

(ii) ONLINE: WPI

Documents considered relevant following a search in respect of Claims :-
 1-14

Categories of documents

- | | |
|--|---|
| <p>X: Document indicating lack of novelty or of inventive step.</p> <p>Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.</p> <p>A: Document indicating technological background and/or state of the art.</p> | <p>P: Document published on or after the declared priority date but before the filing date of the present application.</p> <p>E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.</p> <p>&: Member of the same patent family; corresponding document.</p> |
|--|---|

Category	Identity of document and relevant passages	Relevant to claim(s)
	NONE	

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).

THIS PAGE BLANK (USPTO)